


TRIUMPH® 4315

Dependable semi-automatic tabletop cutter with electric blade drive, manual fast-action clamp, and EASY CUT blade activation.

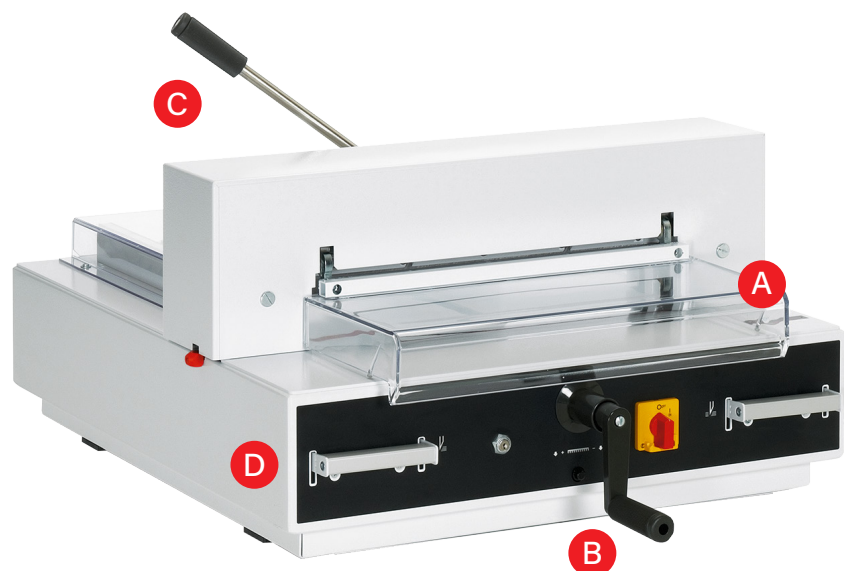

A TRANSPARENT SAFETY GUARD
A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.

B BACK GAUGE HAND CRANK
The calibrated hand crank is used to set the spindle-guided back gauge.

C PATENTED FAST-ACTION CLAMP
After inserting the paper stack, throw the lever on the fast-action clamp to tighten—then cut.

D EASY CUT BLADE ACTIVATION BARS
Patented EASY CUT blade activation bars ensure true, two-hand operation.

E SAFE BLADE CHANGES
Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.




Shown with optional stand and cabinet

BindRite
www.bindrite.com

TRIUMPH®


4315

- Electric blade drive
- Spindle-guided back gauge with calibrated crank
- Front table digital display for precise back gauge positioning
- Bright, LED optical cutting line
- Disc brake for instant blade stop
- Transparent, electronically controlled front safety guard
- Safety cover on rear table
- Main switch and safety lock with key
- Optional stand (shown on front), or cabinet with storage shelves
- 24-volt controls (low voltage)

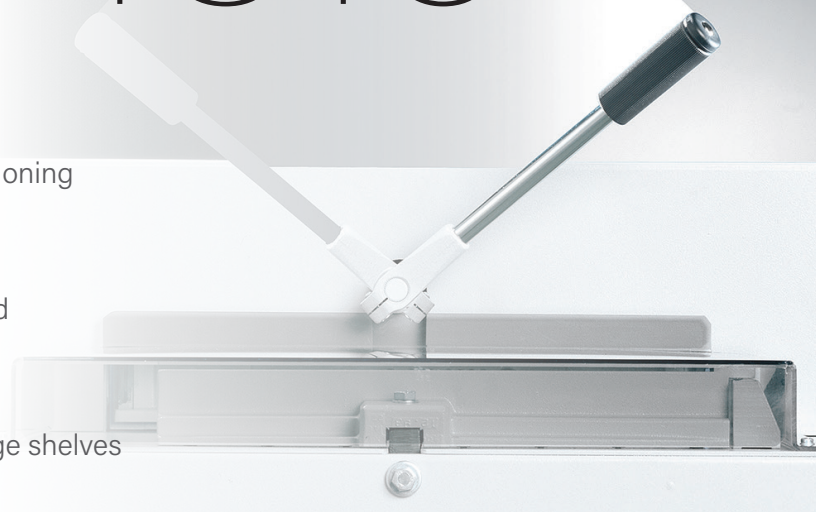

Digital Display

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.

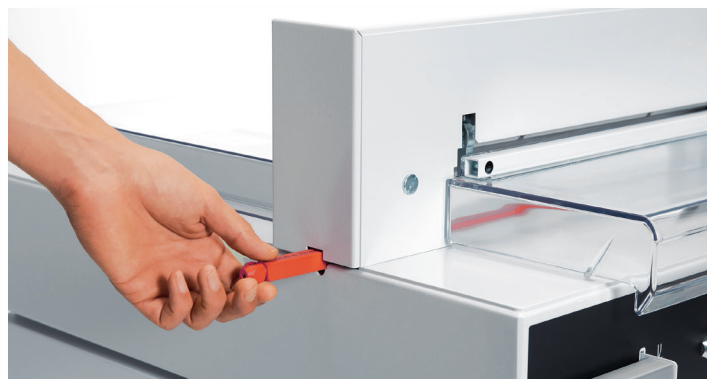

Cutting Stick Change

Cutting sticks can be turned or changed easily from the outside of the machine. No tools are required.

Specifications:

Cutting width	16 ⁷ / ₈ "
Cutting height	1 ¹ / ₂ "
Narrow cut	1 ³ / ₈ "
Dimensions (D x W X H)	34 ¹ / ₄ " x 25" x 14"
Height with stand (H)	42 ³ / ₄ "
Height with cabinet (H)	42 ¹ / ₂ "



Shown with optional cabinet

BindRite
www.bindrite.com