

# TRIUMPH® 4850

Fully automatic cutter with electric blade drive, automatic clamp, and EASY CUT blade activation.



*Shown with optional side tables*



- A TRANSPARENT SAFETY GUARD**  
A cut can only be executed if the hinged, electronically controlled safety guard is in the closed position.
- B BACK GAUGE HAND CRANK**  
The calibrated hand crank is used to set the spindle-guided back gauge.
- C EASY CUT BLADE ACTIVATION BARS**  
Patented EASY CUT blade activation bars ensure true, two-hand operation.
- D SAFE BLADE CHANGES**  
Blade changes can be made without removing the machine covers. The handy blade changing device covers the cutting edge of blade.


# TRIUMPH® 4850

- Ergonomic, 37" working height
- Electric blade drive
- Spindle-guided back gauge with calibrated crank
- Front table digital display (cm or inches) for precise back gauge positioning
- Bright, LED optical cutting line
- Safety cover on rear table
- Main switch and safety lock with key
- 24 volt controls (low voltage)
- Patented IDEAL safety drive
- Automatic blade return from every position
- Disc brake for instant blade stop



## Digital Display

The LED measurement display ensures precise positioning of the back gauge and can be set to cm or inches.

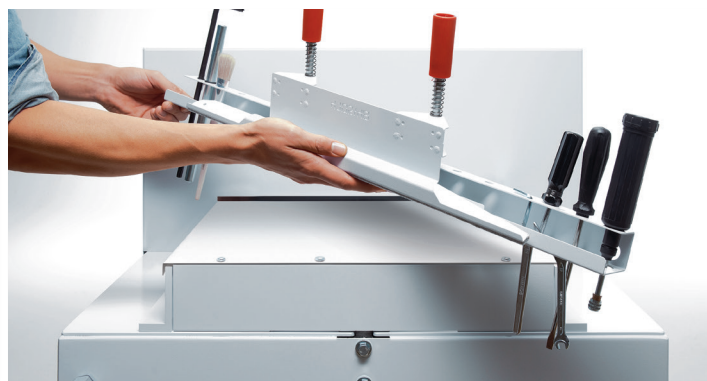


## Tool Holder

Convenient, drop-in tool holder is located on the rear of the machine and keeps all tools necessary for routine maintenance (including blade changes) within reach.

### Specifications:

Cutting width	18 5/8"
Cutting height	3"
Narrow cut	1"
Dimensions (D x W X H)	41 1/2" x 30" x 51"
Width with side table (W)	53"



**BindRite**  
[www.bindrite.com](http://www.bindrite.com)