

Level surface adjustment

Adjustable feet deliver precise levelling on uneven floors and maintain the flatness required to obtain precise cutting accuracy.



Worktop options

The BenchTop Bench is supplied without a worktop, giving you the freedom to choose your own. You can use any suitable sheet material for the worktop, including glass. You can use standard 1.22m (4') wide boards to form the worktop, or 1.525m (5') wide boards if you fit the cantilever extension. Worktop dimensions are shown in the table below. We recommend that worktops should be at least 18mm (3/4") thick to provide a stable surface for cutting.

Cantilever extension

Due to the integral strength of the Proteus construction, the BenchTop Bench can be extended to a 1.525m (5') width worktop, using a specially designed cantilever system. The cantilever kit is included as standard. As well as extending the bench this gives an overhang, under which you can fit a stool or tall chair for comfortable working and legroom. The cantilever extension is fitted to the rear, non-cutter edge of the bench. Evolution3 cutters must be fitted to the front edge which benefits from stronger support.



Five year guarantee

Built from high-grade aluminium alloy, Keencut benches offer a lifetime of service. The clean good looks are maintained through a quality anodising process. By manufacturing in-house, with only the highest quality materials, Keencut is confident to offer a comprehensive five year guarantee.

Dimensions

BenchTop Bench

BindRite
www.bindrite.com



Specifically designed to create the optimum cutting platform for the Evolution3 BenchTop


The BenchTop Bench is specifically designed to create the optimum cutting platform for the Evolution3 BenchTop. The complete stability and perfectly flat surface will ensure that you achieve a reliable and precise cut every time.



Strong, secure and stable

The BenchTop Bench provides the strong and solid foundation required for precise accurate cutting. The unique patented Proteus construction method creates a secure and rigid workbench that will not lose any stability over time. Strength and stability are vital to ensure that you achieve optimum clamping and repeatable, reliable cutting across the full length of the cutter bar. The Proteus construction is easy to assemble, and the internal fittings are concealed for a flush finish and maximum safety under heavy load.

BenchTop Bench

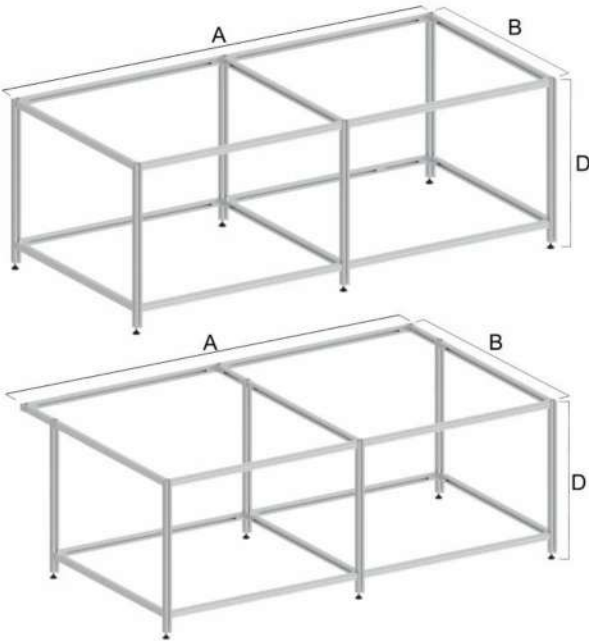

Bench dimensions	BTB110	BTB160	BTB210	BTB260	BTB310	BTB360
A cm (")	148 (58)	198 (78)	248 (97)	298 (117)	348 (137)	398 (156)
B (no cantilever) cm (")	122 (48)	122 (48)	122 (48)	122 (48)	122 (48)	122 (48)
C (with cantilever) cm (")	152.5 (60)	152.5 (60)	152.5 (60)	152.5 (60)	152.5 (60)	152.5 (60)
D cm (")	90 (36)	90 (36)	90 (36)	90 (36)	90 (36)	90 (36)

Packed weights & dimensions	BTB110	BTB160	BTB210	BTB260	BTB310	BTB360
Packed weight KG (lbs)	23 (51)	32 (71)	35 (76.5)	37 (82)	47 (104)	50 (110)
Packed dimensions cm (")	1 box only: Box 1: 178x25x13 (70x10x5)	2 boxes: Box 1: 117x25x13 (46x10x5) Box 2: 92x25x13 (36x10x5)	2 boxes: Box 1: 125x25x13 (49x10x5) Box 2: 92x25x13 (36x10x5)	2 boxes: Box 1: 149x25x13 (59x10x5) Box 2: 92x25x13 (36x10x5)	2 boxes: Box 1: 119x25x13 (47x10x5) Box 2: 141x25x13 (56x10x5)	2 boxes: Box 1: 132x25x13 (52x10x5) Box 2: 157x25x13 (62x10x5)