



DF330

Specifications	
Description	DF330
Feed Speed (Variable)	Variable up to 100/min — Print Engine Dependant
Feed Width	Min 3.0" to Max 13"(76mm / 330mm)
Feed Length	Min 4" to Max 15" (101mm / 381mm)
Dimension (L,W,H)	30" x 16" x 16"
Weight	65 lbs (29.5 kg)
Power Consumption	110V – 5A Peak 24VDC external power supply
Operating Temperature	50° – 90°F
Operating Humidity	20 – 80%
Operation Panel	Main Power, Ready Button, and Variable Speed Control
Casters	4
Belt Life (est.)	300,000 Pages
Warranty	1 Year Limited
Country of Origin	Made in the USA

SIMPLY SET IT UP, ROLL IT IN AND RUN!


Revolutionary features for an ever changing industry... the DF-330, our newest feeder and bench mark for production printing. The DF-330 joins the progressive line of digital printer feeders from Straight Shooter with more new features that will enhance production. Flex Belt™ technology has been designed and incorporated into the DF-330 to eliminate skew and ensure accurate envelope delivery from start to finish. A simplified hopper design and chassis T system make for easy set up and rapid job changeovers from size to size and job to job. A new on board jogging system “jostles” envelopes down to the last piece for care free operation. The new Secure Latch™ system secures the feeder for printer perfect alignment and print registration, every time! All this and more coupled with our standard features and patented Buckle Separation™ and Floating Acceleration Table™ will make your production printer... productive!



New hopper design with built in jogging of media.



Secure Latch™ alignment system

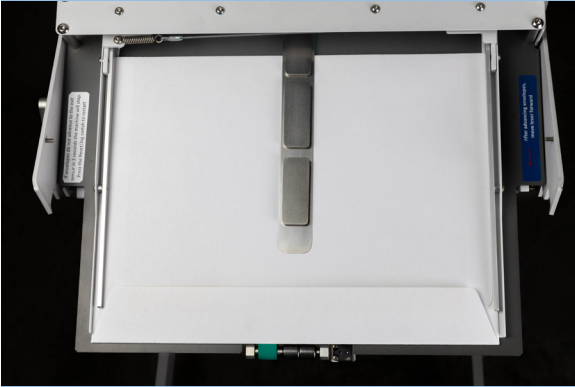

Flexible, runs full 13" wide media portrait or landscape



Flex Belt™ Technology